


## WIDOPAN-Polyester Fleece G 120

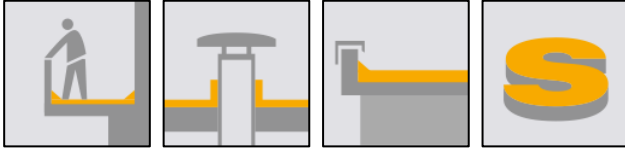

### Basis

100 % Polyester

### Density / specific weight

120 g/m<sup>2</sup>

**Tensile strength md (N/5 cm) 270**

**Tensile strength cd (N/5 cm) 250**

**Elongation md (%) 50**

**Elongation cd (%) 90**

### Sizes supplied

Roll length 50m

Width in cm: 25/35/50/70/105

### Storage

It is essential that the product is protected from moisture. Unlimited shelf life if stored correctly.

WIDOPAN-Polyester Fleece G120 is used to reinforce a number of seals made from the liquid waterproofing WIDOPAN-FD; WIDOPUR-1K, WIDOPUR-LF 2K, WIDOCRYL-Detail or WIDOSIL-WSG.

The special WIDOPAN-Polyester Fleece regulates the layer thickness of the seals applied and improves their breaking strength.

In Addition to its excellent technical properties, WIDOPAN-Polyester Fleece G120 stands out by its rapid and complete impregnation capacity during use. It may be fitted accurately at upstands and transitions.

Further details, especially regarding hazard statements, security advices and measures in the event of fire can be found in the safety data sheet under sections 2, 4, 5, 6, 7 and 8.

**Please also refer to our technical information sheets!**